



ehanddryers.com
PART OF THE O3 GROUP

 **Fumagalli Componenti**

Washroom Evolution



Since 1962

Fumagalli Componenti SpA is an Italian company located in Trezzano S/N, in the hinterland of Milan, and active since 1962. The company, certified ISO 9001:2008, is leader in Italy in the production of electric hand and hair dryers. Throughout the years of its activity, the Company obtained a top position in the Washroom equipment sector with innovative solutions totally in-house made with the aim to promote the Made in Italy in the World.



FUMAGALLI®

BRAND

FUMAGALLI® is the best known brand in Italy among the Hand-dryers and Hair-dryers, recognized and appreciated by millions of users. Synonym of quality, efficiency, safety and high performances, it is the most chosen product from the major Companies to be placed in bathrooms and restrooms.




ITALIAN TRADE STRUCTURE ED EXPORT

The sales, financial and productive seat is located over an area of 30.000 mq. The location in a single area allows the reduction of time required to complete the production/sales cycle.

Fumagalli items are present in over 60 countries all over the world, installed in the most important industrial and commercial plants.

The export structure is continuously developing thanks to the introduction of new items necessary to cover market needs, always more and more demanding for high quality products.

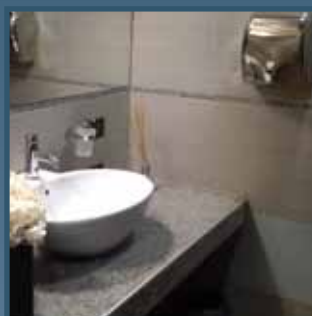



SPECIAL PROJECTS

Fumagalli created a division dedicated to Special Projects. Based on customer request, after a first pre-audit meeting, a group of experts start a feasibility study with the aim to develop different solutions to meet the needs of the customer.

SOME EXAMPLES:

- **Autogrill motorway VILLORESI EST**, complete washroom, specially developed washing station and hand drying solution.
- **MyChef motorway LA PIOPPA**, complete washroom, specially developed washing station, hand drying solution and urinal.

FUMAGALLI COMPONENTI S.p.A.

Italian Company certified ISO 9001:2008, since 1962 leader in the manufacturing of hand dryers known with brands MAGNUM and FUMAGALLI. Today Fumagalli is among leader companies in the complete setting of "washroom" environments, counting among its own customers the most famous brands. Fumagalli designs, develops and produces a wide range of products addressed to hygienic services, offering the most innovative and hi-tech solutions.

BRAND

MAGNUM and FUMAGALLI are the Fumagalli's most known brands for hand dryers products in Italy and the same machines are known in Europe and all over the World with FUMAGALLI brand. Equivalent to reliability, efficiency, safety and high performances, they are admired by millions of people who use them daily.

TECHNOLOGICAL EXCELLENCE

Fumagalli, has a strong inclination towards innovation and it constantly invests instruments and last generation technological solutions.

The accurate analysis of market trends, needs and expectations of customers and the attention to offer an environment saving product, all can be considered as the Company Mission.

The high quality standard is always reached respecting the most strict industry regulations, through methodical inspections during all manufacturing process till finished product.

Into the Research & Development center, unique in Italian, born the new solutions that make products unique and Fumagalli inimitable. Below the main features of the Air Line:

- Energy saving: low power consumption thanks to the application of the latest technology.
- Consumption reduction up to 75%: the ECP electronic control system gives the possibility to program devices according to their usage parameters.
- Maximum hygiene: no-touch systems and the addition of special UVC lamps for the killing of bacteria.
- Ease of maintenance: the LEM patented system allows easy maintenance doubling the life of the product.
- Maximum security: safety devices "SkinCare" and "Water-stop" specific to the hair dryer.

SECURITY AND RELIABILITY

Fumagalli is symbol of competence, technical skill, design and Italian style. The production is certified not only by Third Party Authorities, but also by the references and testimonials of millions of users customers worldwide.

PRODUCTS RANGE

Fumagalli is not only Hand dryer and hair dryer but also:

- Range for Communities and disabled people
- Taps and fittings: electronic
- Accessories: complete range for stainless steel Dispensers and bathroom

But most of all Fumagalli is also Contract Division, that develops and designs customized wash-room solutions through its own in house design team.

CERTIFICATIONS






*Quality Tradition
Innovation*




















Air
HAND DRYER

	TIME POWER TP10	TIME POWER TP10 UVC	FM09A ECP
			
Page Number	14		15
INDICATION OF USE	<ul style="list-style-type: none"> ➤ High frequency usage toilet ➤ Toilet with few drying points and high users ➤ In general where needed a fast drying 	<ul style="list-style-type: none"> ➤ High frequency usage toilet ➤ Toilet with few drying points and high users ➤ In general where needed a fast drying ➤ In general where it is preferable to have an air filtering system provided with UVC germicidal lamp for bacterial killing 	<ul style="list-style-type: none"> ➤ In general where needed a personalized drying in the parameters: <ul style="list-style-type: none"> • Fast drying/noiseless • Noise level • Temperature setting
PLUS	<ul style="list-style-type: none"> ➤ Fast drying ➤ Accessibility to all users (adults, teenagers, disabled) ➤ Energy saving ➤ Inlet air filter ➤ Adjustable air flow speed ➤ Adjustable noise level 	<ul style="list-style-type: none"> ➤ Fast drying ➤ Accessibility to all users (adults, teenagers, disabled) ➤ Energy saving ➤ Inlet air filter ➤ UVC Antibacterial lamp ➤ Adjustable air flow speed ➤ Adjustable noise level 	<ul style="list-style-type: none"> ➤ Usage versatility for its different regulations ➤ Adjustable air flow speed ➤ Adjustable air flow temperature ➤ Fast drying ➤ Energy saving by air temperature probe ➤ Totally recyclable
INSTALLATION SUGGESTIONS	<ul style="list-style-type: none"> ➤ Airports ➤ Exhibition Areas/Fairs ➤ Factories/Offices/Industries ➤ Banks/Insurance Companies ➤ Multiplex Cinemas/Casinos ➤ Public Offices ➤ Great Distribution/Supermarkets ➤ Public Places ➤ Universities 	<ul style="list-style-type: none"> ➤ Airports ➤ Exhibition Areas/Fairs ➤ Factories/Offices/Industries ➤ Banks/Insurance Companies ➤ Multiplex Cinemas/Casinos ➤ Public Offices ➤ Great Distribution/Supermarkets ➤ Public Places ➤ Hospitals ➤ Universities 	<ul style="list-style-type: none"> ➤ Airports ➤ Service Areas ➤ Exhibition Areas/Fairs ➤ Factories/Offices/Industries ➤ Banks/Insurance Companies ➤ Sport Centres ➤ Multiplex Cinemas/Casinos ➤ Shipping Lines ➤ Public Offices ➤ Great Distribution/Supermarkets ➤ Public Places ➤ Tourism ➤ Universities ➤ Wellness
Activation	Sensor		Sensor
Cover material	Stainless steel		Aluminium
Finishing	Bright Satin Enamelled		Chromed Enamelled
Motor power	1100 W		450 W
Heating element	–		2000 W
Total absorption	From 500 to 1100 W		From 300 to 2450 W
Maximum consumption/ drying	3 W		From 2,1 to 9,5 W
Temperature regulation	–		4 levels
Average drying time	10"		14"
Noise level dB	Min (75 - 81) Med (78 - 83) Max (84 - 88)		Min (66 - 70) Max (82 - 90)
LED maintenance warning	Yes		Yes
Filter	Yes		–
UVC device	–	UVC lamp	–

	MG88P LEM 250	MG88A LEM 250	MG88P LEM 450 EP	MG88A LEM 450 EP	MG88A 250 UVC
					
Page Number	16	16	16	16	17
INDICATION OF USE	<ul style="list-style-type: none"> ➤ In general any every toilet ➤ Suitable where maximum resistance to vandal acts is needed 		<ul style="list-style-type: none"> ➤ In general for any toilet ➤ Suitable where faster drying is needed ➤ Suitable where resistance to vandal acts is needed 		<ul style="list-style-type: none"> ➤ In general for any toilet ➤ Suitable where faster drying is needed ➤ Suitable where resistance to vandal acts is needed ➤ Suitable where it is preferable to have a system provided with UVC germicidal lamp for bacterial killing
PLUS	<ul style="list-style-type: none"> ➤ Simple and very sturdy ➤ Anti-writers ceramic coating ➤ LEM system with reduced maintenance 		<ul style="list-style-type: none"> ➤ Simple and very sturdy ➤ Anti-writers ceramic coating ➤ LEM system with reduced maintenance ➤ Fast drying ➤ Energy saving with low absorption heating element 		<ul style="list-style-type: none"> ➤ Simple and very sturdy ➤ Anti-writers ceramic coating ➤ LEM system with reduced maintenance ➤ Fast drying ➤ Energy saving with low absorption heating element ➤ UVC anti-bacterial lamp
INSTALLATION SUGGESTIONS	<ul style="list-style-type: none"> ➤ Service Areas ➤ Factories/Offices/Industries ➤ Sport Centres ➤ Multiplex Cinemas/Casinos ➤ Shipping Lines ➤ Public Offices ➤ Great Distribution/Supermarkets ➤ HORECA ➤ Public Places ➤ Tourism ➤ Universities ➤ Wellness 		<ul style="list-style-type: none"> ➤ Service Areas ➤ Exhibition Centres/Fairs ➤ Factories/Offices/Industries ➤ Sport Centres ➤ Casinos ➤ Shipping Lines ➤ Public Offices ➤ Great Distribution/Supermarkets ➤ Public Places ➤ Tourism ➤ Universities 		<ul style="list-style-type: none"> ➤ Service Areas ➤ Factories/Offices/Industries ➤ Banks/Insurance Companies ➤ Sport Centres ➤ Multiplex Cinemas/Casinos ➤ Shipping Lines ➤ Public Offices ➤ Great Distribution/Supermarkets ➤ Public Places ➤ Hospitals ➤ Tourism ➤ Universities ➤ Wellness
Activation	Push button	Sensor	Push button	Sensor	Sensor
Cover material	Stainless steel AISI 304/ Carbon steel		Stainless steel AISI 304/ Carbon steel		Stainless steel AISI 304/ Carbon steel
Finishing	Bright Satin Porcelain		Bright Satin Porcelain		Bright Satin Porcelain
Motor power	250 W		450 W		250 W
Heating element	2000 W		1500 W		2000 W
Total absorption	2250 W		1950 W		2250 W
Maximum consumption/ drying	13,1 W		9,2 W		13,1 W
Temperetature regulation	–		–		–
Average drying time	21"		17"		21"
Noise level dB	63,9 dB		85 dB		63,9 dB
LED maintenance warning	–		–		–
Filter	–		–		–
UVC device	–		–		UVC lamp

	MG88IP EP	MG88IA EP	LW44A	LW44A NATUS SPRINT
				 
Page Number	18		19	
INDICATION OF USE	<ul style="list-style-type: none"> ► Suitable where minimum size is needed ► Suitable where maximum resistance to vandal acts is needed ► Required wall with 20 cm depth 		<ul style="list-style-type: none"> ► Suitable where minimum size and noise level are needed 	<ul style="list-style-type: none"> ► Suitable for small installation places and high volume of users, together with a unique design ► Suitable where an automatic control of outlet air temperature is needed
PLUS	<ul style="list-style-type: none"> ► Built-in installation ► Simple and very sturdy 		<ul style="list-style-type: none"> ► Shapely design ► Reduced Size ► Minimum noise level 	<ul style="list-style-type: none"> ► Shapely design ► Heating air automatic sensor ► Fast drying ► UV Sanitizing device
INSTALLATION SUGGESTIONS	<ul style="list-style-type: none"> ► Airports ► Service Areas ► Exhibition Centres/Fairs ► Industries ► Sport Centres ► Multiplex Cinemas/Casinos ► Public Offices ► Great Distribution/Supermarkets ► Public Places ► Penitentiaries ► Tourism ► Universities ► Wellness 		<ul style="list-style-type: none"> ► Companies/Offices ► Banks/Insurance Companies ► Libraries ► Multiplex Cinemas ► Shipping Lines ► Public Offices ► Tourism ► Wellness 	<ul style="list-style-type: none"> ► Airports ► Service Areas ► Exhibition Centres/Fairs ► Industries ► Sport Centres ► Multiplex Cinemas/Casinos ► Shipping Lines ► Public Offices ► Great Distribution/Supermarkets ► Public Places ► Tourism ► Universities
Activation	Push button	Sensor	Sensor	
Cover material	Stainless steel AISI 304		Stainless steel AISI 304/ Carbon steel	
Finishing	Bright Satin		Bright Satin Enamelled	
Motor power	450 W		140 W	500 W
Heating element	1500 W		1500 W	650 - 750 W
Total absorption	From 1550 to 1950 W		1640 W	From 500 to 1250 W
Maximum consumption/ drying	9,7 W		13,6 W	3,6 W
Temperetature regulation	-		-	
Average drying time	18"		30"	7 - 12"
Noise level dB	Min (64 - 74) Max (84 - 89,5)		-	70 dBA at 1 m
LED maintenance warning	-		-	
Filter	-		-	Yes
UVC device	-		-	Yes


	LW44A SPEED-MAX 100	LW44A SPEED-MAX 200	TPSM SPEED-MAX 550
			
Page Number	20		22
INDICATION OF USE	<ul style="list-style-type: none"> ➤ Suitable for small installation places and high volume of users ➤ Suitable where an automatic control of outlet air temperature is needed 	<ul style="list-style-type: none"> ➤ Suitable for small installation places and high volume of users ➤ Suitable where a manual control of outlet air temperature is needed 	<ul style="list-style-type: none"> ➤ Suitable for high frequency toilet ➤ Toilet with few drying points ➤ In general where a very fast drying is needed ➤ Suitable where maximum elegance is needed
PLUS	<ul style="list-style-type: none"> ➤ Reduces size ➤ Heating air automatic sensor ➤ Reduced size ➤ Fast drying ➤ UV Sanitizing device 	<ul style="list-style-type: none"> ➤ Reduces size ➤ Heating air manual switch ➤ Reduced size ➤ Fast drying ➤ Ion generator for air purification 	<ul style="list-style-type: none"> ➤ Motor: air speed Jet system BRUSHLESS ➤ Air filter: HEPA included ➤ UV Lamp: included ➤ Drip tray: Yes ➤ Hand dryer activation service switch: power switch On/Off ➤ Motor speed service switch: High/Low ➤ Heating air activation service switch: supply switch On/Off ➤ Temperature control: automatic probe with heating element automatic activation for temperature below 25 °C and temperature control
INSTALLATION SUGGESTIONS	<ul style="list-style-type: none"> ➤ Airports ➤ Service Areas ➤ Exhibition Areas/Fairs ➤ Industries ➤ Sport Centres ➤ Multiplex Cinemas/Casinos ➤ Shipping Lines ➤ Public Offices ➤ Great Distribution/Supermarkets ➤ Public Places ➤ Tourism ➤ Universities 	<ul style="list-style-type: none"> ➤ Airports ➤ Service Areas ➤ Exhibition Areas/Fairs ➤ Industries ➤ Sport Centres ➤ Multiplex Cinemas/Casinos ➤ Shipping Lines ➤ Public Offices ➤ Great Distribution/Supermarkets ➤ Public Places ➤ Tourism ➤ Universities 	<ul style="list-style-type: none"> ➤ Airports ➤ Service Areas ➤ Exhibition Areas/Fairs ➤ Industries ➤ Sport Centres ➤ Multiplex Cinemas/Casinos ➤ Shipping Lines ➤ Public Offices ➤ Great Distribution/Supermarkets ➤ Public Places ➤ Tourism ➤ Universities
Activation	Sensor	Sensor	Sensor
Cover material	Stainless steel AISI 304	Aluminium	ABS self-extinguishing - Antimicrobial
Finishing	Bright Satin	Enamelled White Bright	-
Motor power	550 W	550 W	750 W
Heating element	651 - 750 W	700 W	0 - 1100 W
Total absorption	From 500 to 1250 W	From 500 to 1250 W	1850 W (Max)
Maximum consumption/drying	3,6 W	4,08 W	4,62 W
Temperature regulation	Automatic sensor Temperature regulation with automatic activation if temperature below 25° c	-	Automatic perature regulation with automatic activation if temperature below 25° c
Average drying time	7 - 12"	8 - 12"	7 - 10"
Noise level dB	70 dBA at 1 m	82 dBA at 1 m	72 dBA at 1 m
LED maintenance warning	-	-	-
Filter	Yes	Yes	Yes
UVC device	UV Lamp	Ion Generator	UV Lamp

FUMAGALLI® TIME POWER TP10

Ultra fast drying, only 10 seconds

Thanks to its unique tubular system with micro-jets, it grants hand drying in few seconds. The air delivery system through the micro-jets with hands horizontally positioned is designed to quickly split the drops of water reducing the dripping on the floor, as it normally happens with vertical hand dryers.

This unique hand dryer, placed at 110 cm from the floor, allows an easy access to anybody also to people with reduced mobility.

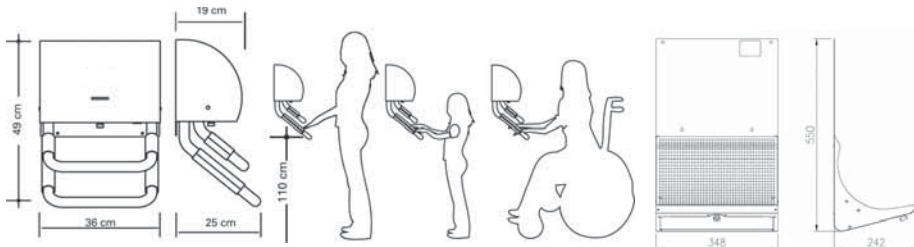

	TP10	TP10 UVC
Activation	Sensor	
Cover material	Stainless steel	
Finishing	Bright/Satin/Enamelled	
Electrical protection level	Class I	
Ingress protection level	IP24	
Supply voltage	220/240 V	
Main frequency	50/60 Hz	
Motor power	1100 W	
Heating element	-	
Total absorption	From 500 to 1100 W	
Maximum absorption with drying cycle	3 W	
Temperature regulator	-	
Adjustable outlet air speed	403 - 534 km/h	
Air flow (according to air speed)	180 - 241 m³/h	
Average drying time (according to air speed)	10"	
Noise level (according to air speed)	Min (75 - 81) - Med (78 - 83) - Max (84 - 88)	
LED maintenance warning	Yes	
Filter	Yes	
UVC device	-	UVC lamp
Test certificate	Yes	
Pcs/Box	1	
Pcs/Pallet	10	

Standard range

Drop-Stop OPZION

TP10 (b) White	TP10 (l) Inox Bright stainless steel	TP10 (s) Inox Satin stainless steel	
Versione UVC			
TP10 (b) UVC White	TP10 (l) UVC Inox Bright stainless steel	TP10 (s) UVC Inox Satin stainless steel	TP10R-01 Inox Satin stainless steel



Colour range



Colour range (RAL) - Upon request with MOQ



FUMAGALLI®

TIME POWER TP10



FAST DRYING

Average drying time: 10 seconds

HYGIENIC

No hands contact with the product.

Air intake far from the floor.

UVC lamp reduces bacteria.

ECONOMICAL

It absorbs less than 3 watts for drying cycle, thanks to the lack of heating element.

Reduction of energy consumption varying the air flow.

EASY AND FAST MAINTENANCE

Modular system for simple maintenance.

http://www.youtube.com/channel/UCKenFgl-a_t8YpcU_2g-VMQ

ACCESSIBLE

Simple to be used, accessible to anyone.




OPZION
Drop-Stop
TP10R-01

FUMAGALLI® FM09A ECP

It reduces energy consumption of 80%

Hand dryer equipped with a new technology that takes the washroom temperature and automatically varies the outlet air temperature, the result is the reduction of energy consumption up to 50% compared with conventional models. Available in the standard version or with air-flow regulator. Equipped with maintenance LED alert system and automatic switch off system for motor protection.

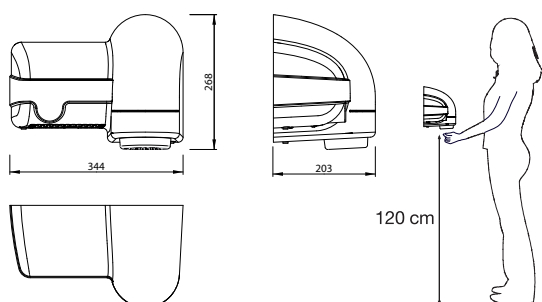

	FM09A ECP
Activation	Sensor
Cover material	Aluminium
Finishing	Chromed/Enamelled
Electrical protection level	Class I
Ingress protection level	IP23
Supply voltage	220/240 V
Main frequency	50/60 Hz
Motor power	450 W
Heating element	2000 W
Total absorption as per factory setting Level 3 (35 °C - 40 °C)	Min (1400 W) Max (1800 W)
Maximum absorption with drying cycle Level 3 (35 °C - 40 °C)	7 W
Temperature regulator *	4 livelli
Adjustable outlet air speed	83 - 165,5 km/h
Air flow (according to air speed)	230 - 470 m³/h
Average drying time (according to air speed)	14"
Noise level (according to air speed) recorded at 50 cm	Min (78 dB) - Max (90 dB)
Noise level (according to air speed) recorded at 100 cm	Min (70 dB) - Max (85 dB)
Noise level (according to air speed) recorded at 300 cm	Min (66 dB) - Max (82 dB)
LED maintenance warning	Yes
Test certificate	Yes
Pcs/Box	1
Pcs/Pallet	32

SPECIAL
PRICE
2015

Standard range

FM09A (b) ECP White with antimicrobial treatment	FM09A (a) ECP Black	FM09A (l) ECP Bright chromed

Colour range



Colour range (RAL) - Upon request with MOQ



HI-TECH FM09A ECP version (Turbo)

ENERGY BENEFITS

Consumption reduction for each drying up to **80%** than traditional Hand dryers (see chart).

AVOIDING QUEUES - FAST DRYING

Average drying time: 14/20 SECONDS

ELECTRONIC INTELLIGENCE

Orange and red LED warn the maintainer about the approaching of need of maintenance

MAINTENANCE COSTS BENEFITS

The long life motor-fan block (LEM system) guarantees over 2000 hours of continuous working. It can be replaced in **3 minutes**.

HYGIENIC

Enamelled white finishing with Antimicrobial treatment or bright chromed

CLEVER

It detects the outside temperature varying the absorption of the heating element based on the set air temperature.

VERSATILE


- Airflow regulation = drying speed
- Noise level regulation
- Temperature regulation

LEVEL	ECP	Maximum absorption/ drying
Total absorption at Level 1 (25 °C - 30 °C)	300 - 550 W	2,1 W
Total absorption at Level 2 (30 °C - 35 °C)	1000 - 1500 W	5,8 W
Total absorption at Level 3 (35 °C - 40 °C)	1400 - 1800 W	7 W
Total absorption at Level 4 (45 °C - 50 °C)	1900 - 2450 W	9,5 W

FUMAGALLI® MG88

The original

Version with push button activation or by photocell, power 250/450. Anti-vandal and anti-theft hand dryer. Sturdy structure made of carbon steel with anti-writer (special treatment that allows easy cleaning of the surface) available on the black and white porcelain version, alternatively stainless steel AISI 304 in satin or bright version. Long life motor equipped with LEM patented system which allows fast and easy maintenance. The 450 version decreases drying time and consumption of 25%

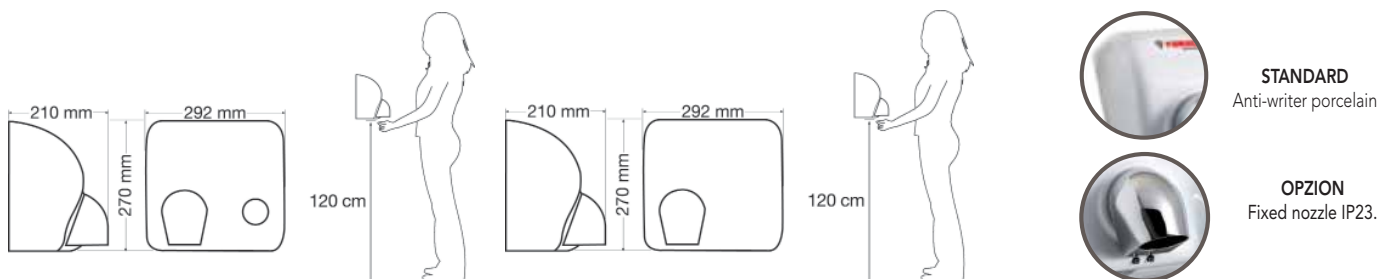

	MG88P LEM 250	MG88A LEM 250	MG88P LEM 450 EP	MG88A LEM 450 EP
Activation	Push button	Sensor	Push button	Sensor
Cover material	Stainless steel AISI 304/Carbon steel			
Finishing	Bright/Satin/Enamelled			
Electrical protection level	Class I			
Ingress protection level	IP21 (IP23 with fixed nozzle)			
Supply voltage	220/240 V			
Main frequency	50/60 Hz			
Motor power	250 W	450 W		
Heating element	2000 W	1500 W		
Total absorption	2250 W	1950 W		
Maximum absorption with drying cycle	13,1 W	9,2 W		
Adjustable outlet air speed	105 km/h	160 km/h		
Air flow	258 m³/h	450 m³/h		
Average drying time	21"	17"		
Noise level	63,9 dB	85 dB		
Test certificate	Yes			
Pcs/Box	1			
Pcs/Pallet	32			

Standard range				Serie EP			
Push button							
							
MG88P (b) LEM 250 - White	MG88P (a) LEM 250 - Black	MG88P (l) LEM 250 - Inox Bright	MG88P (s) LEM 250 - Inox Satin	MG88P (b) EP LEM 450 - White	MG88P (a) EP LEM 450 - Black	MG88P (l) EP LEM 450 - Inox Bright	MG88P (s) EP LEM 450 - Inox Satin
Sensor							
							
MG88A (b) LEM 250 - White	MG88A (a) LEM 250 - Black	MG88A (l) LEM 250 - Inox Bright	MG88A (s) LEM 250 - Inox Satin	MG88A (b) EP LEM 450 - White	MG88A (a) EP LEM 450 - Black	MG88A (l) EP LEM 450 - Inox Bright	MG88A (s) EP LEM 450 - Inox Satin

Colour range




Colour range (RAL) - Upon request with MOQ

LEM system



FUMAGALLI® MG88 UVC
The original, with UVC antibacterial lamp

Push-button or automatically operated by photocell, equipped with a special UVC lamp. Anti-vandal and anti-theft. Sturdy structure made of carbon steel with anti-writer (special treatment that allows easy cleaning of the surface) available in black or white porcelain version, alternatively stainless steel AISI 304 in satin or bright version. Long life motor equipped with LEM patented system which allows fast and easy maintenance.

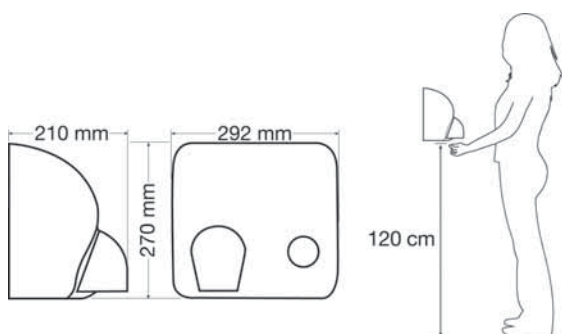

STANDARD
Anti-writer
porcelain



OPZION
Fixed nozzle
IP23

	MG88A 250 UVC
Activation	Sensor
Cover material	Stainless steel AISI 304/Carbon steel
Finishing	Bright/Satin/Enamelled
Electrical protection level	Class I
Ingress protection level	IP21 (IP23 with fixed nozzle)
Supply voltage	220/240 V
Main frequency	50/60 Hz
Motor power	250 W
Heating element	2000 W
Total absorption	2250 W
Maximum absorption with drying cycle	13,1 W
Adjustable outlet air speed	105 km/h
Air flow	258 m³/h
Average drying time	21"
Noise level	63,9 dB
UVC device	UVC lamp
Test certificate	Yes
Pcs/Box	1
Pcs/Pallet	32

Standard range
Sensor

MG88A (b) UVC White, with UVC lamp	MG88A (l) UVC Inox Bright, with UVC lamp	MG88A (s) UVC Inox Satin, with UVC lamp

Colour range


Colour range (RAL) - Upon request with MOQ


**HAND DRYERS
WITH UVC SYSTEM**


MG88A UVC

ADVANTAGES

Apart from TÜV Rheinland, that certified our product on safety, the UVC system has been tested by a primary Italian laboratory of Microbiology: the tests confirmed that the UVC system kills at 99,9% the STR.FAECALIS bacteria.

MAIN INSTALLATION PLACES FOR UVC DRYERS

- Hospitals
- Food industries
- Schools
- Ho.Re.Ca sector

UVC Lamp Lasting: 6000 hours - 8 months




Antibacterial
UVC lamp

Fumagalli Componenti
is the owner of the Utility patent
for the manufacturing of hand dryers
equipped with UVC systems.

FUMAGALLI® MG88 SPACE PUSH BUTTON

Built-in minimal design

Concealed, vandal resistant. Design and functionality combined with the quality characteristics and sturdiness of MG88 hand dryers led to "SPACE" ideal to satisfy both the esthetical and the practical aspects. The built-in model is entirely made of stainless steel; the minimal amount of space leaves room free in the surrounding area, reducing also the possibility of acts of vandalism. Available with push button or sensor, with revolving nozzle.

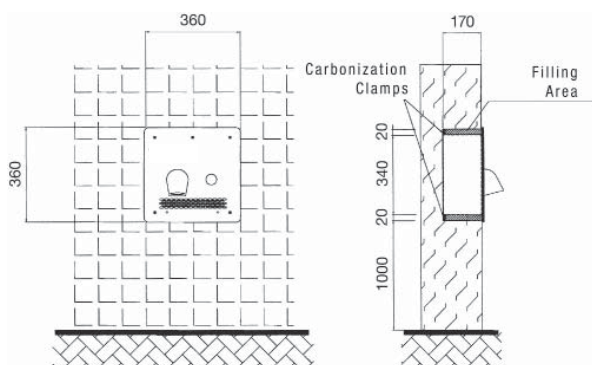


	MG88IP EP
Activation	Push button
Cover material	Stainless steel AISI 304
Finishing	Bright/Satin
Electrical protection level	Class I
Ingress protection level	IP21 (IP23 with fixed nozzle)
Supply voltage	220/240 V
Main frequency	50/60 Hz
Motor power	450 W
Heating element	1500 W
Total absorption	From 1550 to 1950 W
Maximum absorption with drying cycle	9,7 W
Adjustable outlet air speed	65 - 126 km/h
Air flow (according to air speed)	150 - 350 m³/h
Average drying time (according to air speed)	18"
Noise level (according to air speed) recorded at 50 cm	Min (74) Max (89,5)
Noise level (according to air speed) recorded at 100 cm	Min (67,5) Max (86)
Noise level (according to air speed) recorded at 300 cm	Min (64) Max (84)
Test certificate	Yes
Pcs/Box	1
Pcs/Pallet	18

FUMAGALLI® MG88 SPACE SENSOR

Built-in minimal design

Concealed, vandal resistant. Design and functionality combined with the quality characteristics and sturdiness of MG88 hand dryers led to "SPACE" ideal to satisfy both the esthetical and the practical aspects. The built-in model is entirely made of stainless steel; the minimal amount of space leaves room free in the surrounding area, reducing also the possibility of acts of vandalism. Available with push button or sensor, with revolving nozzle.

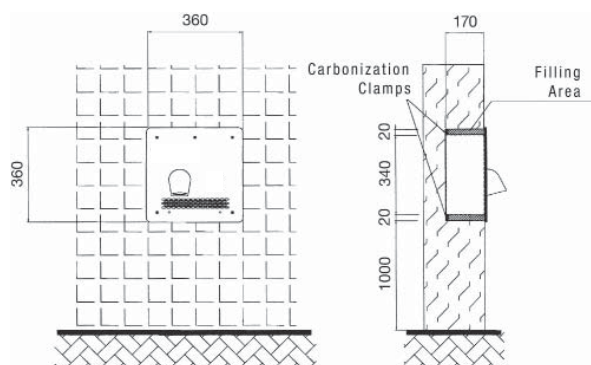

	MG88IP EA
Activation	Sensor
Cover material	Stainless steel AISI 304
Finishing	Bright/Satin
Electrical protection level	Class I
Ingress protection level	IP21 (IP23 with fixed nozzle)
Supply voltage	220/240 V
Main frequency	50/60 Hz
Motor power	450 W
Heating element	1500 W
Total absorption	
Maximum absorption with drying cycle	9,7 W
Adjustable outlet air speed	65 - 126 km/h
Air flow (according to air speed)	150 - 350 m³/h
Average drying time (according to air speed)	18"
Noise level (according to air speed) recorded at 50 cm	Min (74) Max (89,5)
Noise level (according to air speed) recorded at 100 cm	Min (67,5) Max (86)
Noise level (according to air speed) recorded at 300 cm	Min (64) Max (84)
Test certificate	Yes
Pcs/Box	1
Pcs/Pallet	18

Standard range

	
MG88IP (l) EP Bright	MG88IP (s) EP Satin

Standard range

	
MG88IP (l) EA Bright	MG88IP (s) EA Satin

Colour range



Colour range (RAL) - Upon request with MOQ

Colour range




Colour range (RAL) - Upon request with MOQ

FUMAGALLI® NATUS LW44A

Classical and elegant

Automatically operated by photocell, air blows for the required time by positioning the hands below the outlet. The compact and minimal shape makes it suitable for small washrooms. Conceived to reduce time of maintenance.

Long-life motor, over 2.000.000 dryings.

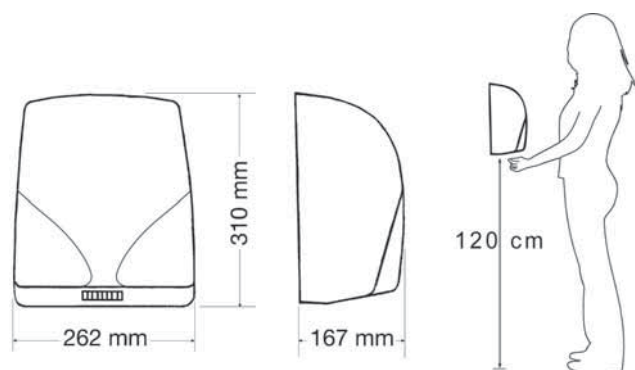

	LW44A
Activation	Sensor
Cover material	Stainless steel AISI 304/Carbon steel
Finishing	Bright/Satin/Enamelled
Electrical protection level	Class II
Ingress protection level	IP21
Supply voltage	220/240 V
Main frequency	50/60 Hz
Motor power	140 W
Heating element	1500 W
Total absorption	1640 W
Maximum absorption with drying cycle	13,6 W
Temperature regulator	-
Adjustable outlet air speed	64,5 km/h
Air flow (according to air speed)	170 m³/h
Average drying time (according to air speed)	30"
Noise level (according to air speed) recorded at 50 cm	69 dB
Noise level (according to air speed) recorded at 100 cm	61,5 dB
Noise level (according to air speed) recorded at 300 cm	54,5 dB
UVC device	-
Test certificate	Yes
Pcs/Box	1
Pcs/Pallet	40


FUMAGALLI® NATUS LW44A SPRINT

Classic design, new frame, fast, hygienical and clever

Activation by photocell, high speed motor for fast drying.

Clever system for control temperature by automatic prob which activates the heating element in case of temperature below 25°C.

UV Lamp for a better air sanitation.

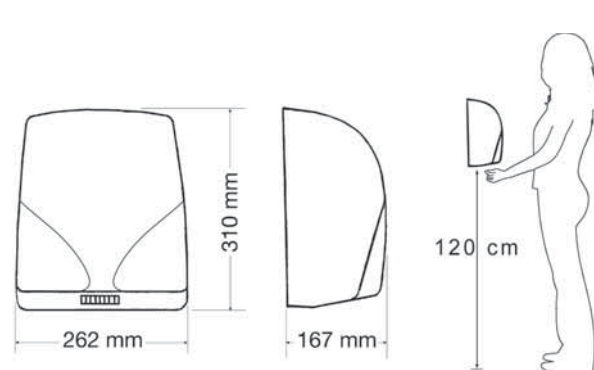

	LW44A NATUS SPRINT
Activation	Sensor
Cover material	Stainless steel AISI 304/Carbon steel
Finishing	Bright/Satin/Enamelled
Electrical protection level	Class I
Ingress protection level	IPX1
Supply voltage	220/240 V
Main frequency	50/60 Hz
Motor power	500 W
Heating element	650 - 750 W
Total absorption	From 500 to 1250 W
Maximum absorption with drying cycle	3,6 W
Temperature regulator	-
Outlet air speed	216 km/h
Air flow (according to air speed)	570 m³/h
Average drying time	7 - 12"
Noise level dB	70 dBA at 1 m
Filter	Yes
Dispositivo UV	Yes
Test certificate	Yes
Pcs/Box	1
Pcs/Pallet	40

COMING
SOON

SPECIAL
PRICE
2015/2016

Standard range

LW44A (b) White	LW44A (a) Black	LW44A (l) Inox Bright	LW44A (s) Inox Satin

SPECIAL
PRICE
2015/2016

Standard range

LW44A SPRINT (b) White	LW44A SPRINT (a) Black	LW44A SPRINT (l) Inox Bright	LW44A SPRINT (s) Inox Satin

Colour range



Colour range (RAL) - Upon request with MOQ

Colour range




Colour range (RAL) - Upon request with MOQ

FUMAGALLI® LW44A SPEED-MAX 100

Small, powerful, fully automatic

One of the smallest hand dryers ever realized, it is operated by photocell and provides a powerful air flow concentrated for the desired time. The reduced dimensions make it particularly suitable for small bathrooms or for installation between mirrors above washbasin, furthermore, the temperature automatic sensor, regulates the activation of the heating element just in case the ambient temperature drop below 25°C achieving significant energy savings. The UV device and the filter of which the hand dryer is equipped, purify the inlet air and later the outlet air.

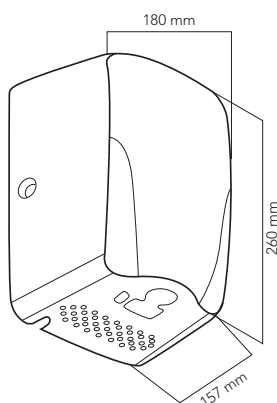


	LW44A SPEED-MAX 100
Activation	Sensor
Cover material	Stainless steel AISI 304/Carbon steel
Finishing	Bright/Satin
Electrical protection level	Class I
Ingress protection level	IPX1
Supply voltage	220/240 V
Main frequency	50/60 Hz
Motor power	550
Heating element	651 - 750 W
Total absorption	From 500 to 1250 W
Maximum absorption with drying cycle	3,6 W
Temperature regulator	-
Outlet air speed fissa	216 km/h
Air flow	570 m³/h
Average drying time	7 - 12"
Noise level dB	70 dBA at 1 m
LED maintenance warning	-
Filter	Yes
UV device	Yes
Test certificate	Yes
Pcs/Box	1
Pcs/Pallet	-

NEW

FUMAGALLI® LW44A SPEED-MAX 200

Vertical microjets hand dryer

Compact hand dryer, operated by photocell, provides a wide air-flow through powerful microjets for the desired time. The reduced size makes it particularly suitable for small toilets or for installation between mirrors above sink. The hand dryer is equipped with a specific switch for the activation of the heating element for heating airflow and with a ion generator for environment purification or in alternative for smell softening.

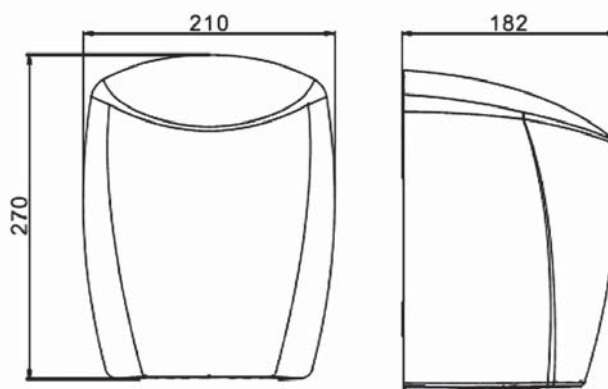

	LW44A NATUS SPED-MAX 200
Activation	Sensor
Cover material	Bright Chromed Aluminium/Enamelled White
Finishing	Bright/Enamelled
Electrical protection level	Class I
Ingress protection level	IPX1
Supply voltage	220/240 V
Main frequency	50/60 Hz
Motor power	550
Heating element	700 W
Total absorption	From 550 to 1250 W
Maximum absorption with drying cycle	4,08 W
Temperature regulator	-
Fixed outlet airspeed	288 km/h
Air flow	516 m³/h
Average drying time	8 - 12"
Noise level dB	82 dBA at 1 m
LED maintenance warning	-
Filter	Yes
UV device	Ion generator
Test certificate	Yes
Pcs/Box	1
Pcs/Pallet	-

COMING SOON

SPECIAL PRICE
2015/2016

Standard range



LW44SM-100 (l)
Bright



LW44SM-100 (s)
Satin

SPECIAL PRICE
2015/2016

Standard range



LW44SM-200 (b)
Enamelled white



LW44SM-200 (l)
Bright

NEW**COMING
SOON**

LW44A SPEED-MAX 100



PLUS

- Reduced size
- Heating air automatic sensor
- Fast drying
- UV sanitizing device

APPLICATION INDICATION

- Suitable for limited space of installation with high volume of users
- Suitable where the automatic control of the outlet air temperature is needed

LW44A SPEED-MAX 200



PLUS

- Reduced size
- Heating air manual switch
- Fast drying
- Lon generator for air purification

APPLICATION INDICATION

- Suitable for limited space of installation with high volume of users
- Suitable where the automatic control of outlet air temperature is needed

COMING
SOON

TPSM SPEED-MAX 550



PLUS

- **Motor:** high speed Jet system BRUSHLESS
- **Air filter:** HEPA included
- **UV Lamp:** included
- **Drip Tray:** Included
- **Hand dryer activation service switch:** Supply switch On/Off
- **Motor speed service switch:** High/Low
- **Heating element activation service switch:** supply switch On/Off
- **Temperature control:** automatic probe with automatic heating element activation for temperature below 25 °C and temperature control


INDICATION OF USE

- Suitable for toilet with high volume of users
- Toilet with few drying points
- In general where a super fast drying is needed

FUMAGALLI TPSM SPEED-MAX 550

Pocket-shape Hand dryer

Simple and elegant line for the integration in design toilets. It is realized in sturdy anti-vandal ABS and Fireproof in White or silver finish. Super fast drying in 7-10" secured by Brushless turbine motor with speed setting: High and Low. General switch. Complete with Hepa filter, UV lamp and drip tray. Heating element disconnectable and temperature automatic control by electronic probe.

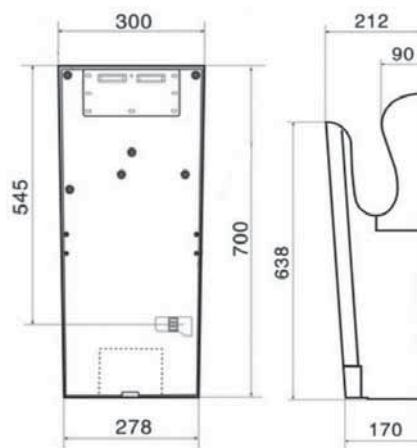

	LW44A NATUS SPED-MAX550
Activation	Sensor
Cover material	ABS Autoestinguente
Finishing	
Electrical protection level	Class I
Ingress protection level	IPX4
Supply voltage	220/240 V
Main frequency	50/60 Hz
Motor power	750 W
Heating element	0 - 1100 W
Total absorption	1850 W (MAX)
Temperature regulator	Sensor Sensor
Outlet air speed fissa	90 m/s (324 Km/h)
Air flow	n.d.
Average drying time	7 - 10"
Noise level dB	72 dBA at 1 m
LED maintenance warning	Data digital screen
Filter	Yes
UV device	UVA included
Test certificate	
Air temperature at 15 cm	20 - 40 °C
Pcs/Box	1
Pcs/Pallet	-

COMING
SOON




SPECIAL
PRICE
2015/2016





Standard range

TPSM-550 (b) ABS White	TPSM-550 (s) ABS Silver



Air
HAIR DRYER


	MG88H	MG88HT	MH910
			
Page Number	26	27	28
INDICATION OF USE	SUITABLE FOR: ► Sport Centres ► Swimming Pools ► Gyms ► Generally intended for male users	SUITABLE FOR: ► Sport Centres ► Swimming Pools ► Gyms ► Generally intended for female and children users	SUITABLE FOR: ► Wellness Centres ► Hotel
PLUS	► Simple and sturdy ► Anti-vandal ► Stainless steel bright or satin shell, in alternative porcelain finish, ideal anti-writing solution and anti-burns ► Fast drying ► Compatible with paid services systems ► Electrical protection Class II	► Simple and sturdy ► Anti-vandal ► Stainless steel bright or satin shell, in alternative porcelain finish, ideal anti-writing solution and anti-burns ► Fast drying ► Extensible tube with super resistant steel core ► Compatible with paid services systems ► Electrical protection Class II	► Hair dryer equipped with extensible tube and adjustable nozzle with low noise level ► Long life motor with automatic activation upon nozzle release ► Programmed Switch off provided by safety timer after 8 minutes of continuous operation ► Bayonet connection for easy of maintenance ► Coupling by magnet ► Electrical protection Class II
Activation	Push button		Automatic when removing handle from holder
Cover material	Stainless steel AISI 304/ Carbon steel		Added with antistatic ABS
Finishing	Bright Satin Porcelain		-
Motor power	250 W		
Heating element	2000 W	750 W	
Total absorption	2250 W	1000 W	1200 W
Fixed Outlet air speed	98,3 km/h		90 km/h
Adjustable outlet air speed	-		
Airflow	250 m ³ /h		17 lt/sec
Noise level dB	63,9 dB		
Air temperature at 15 cm	46,8 °C		
Double shave socket			

	R810	MH610	MH710C	MH710A
				
Page Number	28	29		30
INDICATION OF USE	SUITABLE FOR: ► Hotel	SUITABLE FOR: ► Wellness centres ► Hotel	SUITABLE FOR: ► Hotel	SUITABLE FOR: ► Cruise Ships' cabins ► Wellness Centres ► Hotel
PLUS	<ul style="list-style-type: none"> ► Hair dryer equipped with extensible tube and adjustable nozzle with low noise level ► Automatic motor activation upon nozzle release ► Programmed Switch off provided by safety timer after 4 minutes of continuous operation ► Bayonet connection for easy of maintenance ► Coupling by magnet ► Double shaver socket ► Electrical protection Class II 	<ul style="list-style-type: none"> ► Gun hair dryer with wall mounting and low noise level ► Equipped with air-inlet grille ► ON-OFF switch and safety transformer ► Push button activation with standard setting of air flow and air temperature ► Electrical protection Class II 	<ul style="list-style-type: none"> ► Gun hair dryer with wall mounting, low noise level and equipped with triple universal socket ► Equipped with air-inlet grille ► ON-OFF switch and adjustable air temperature ► Push button activation with triple setting of air temperature (cool-medium-hot) ► Electrical protection Class II 	<ul style="list-style-type: none"> ► Drawing hair dryer with low noise level ► Equipped with air-inlet grille ► ON-OFF switch and safety transformer ► Coiled cable extensible up to 3 metres with European socket ► Push button activation with standard setting of air flow and air temperature ► Electrical protection Class II
Activation	Automatic when removing handle from holder	Push button	Push button	Push button
Cover material	ABS/ PC	ABS	ABS	PC
Finishing				
Motor power				
Heating element				
Total absorption	800 W	1200 W	200 - 1200 W	1200 W
Fixed Outlet air speed				
Adjustable outlet air speed	Yes			
Airflow	-	22,5 Lt/sec	80 m 3/h	22,5 Lt/sec
Noise level dB				
Air temperature at 15 cm				
Double shave socket	110 - 120V/220 - 240V			

FUMAGALLI® MG88H LEM

Ideal for fitness centre

Anti-vandal and anti-theft, high-performance warm air hair dryer, equipped with revolving nozzle with thermal protection. Sturdy structure made of carbon steel with anti-rust treatment available on the black and white porcelain version, alternatively stainless steel AISI 304 in satin or bright version. Completed by SKINCARE & WATER STOP safety devices. Electrical protection level: Class II. Long life motor equipped with LEM patented system which allows fast and easy maintenance. Matching with single or multiple coin box for paying service and with the sliding rail for height adjustment.

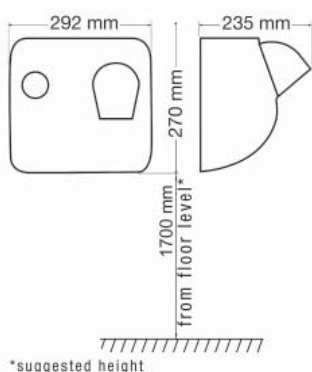

Water stop device



LEM system



STANDARD
Anti-rust
porcelain



STANDARD
Nozzle with
skincare
protection

	MG88H LEM
Activation	Push button
Cover material	Stainless steel AISI 304/Carbon steel
Finishing	Bright/Satin/Enamelled
Electrical protection level	Class II
Ingress protection level	IP21 (IP23 with fixed nozzle)
Supply voltage	220/240 V
Main frequency	50/60 Hz
Motor power	250 W
Heating element	2000 W
Total absorption	2250 W
Outlet air speed	98,3 km/h
Air flow	250 m³/h
Air temperature at 15 cm	46,8 °C
Noise level	63,9 dB
Test certificate	Yes
Pcs/Box	1
Pcs/Pallet	40

Standard range

MG88H (b) LEM White	MG88H (a) LEM Black	MG88H (l) LEM Inox Bright	MG88H (s) LEM Inox Satin

Combination with accessories




Sliding rail C9900

FUMAGALLI® SLIDING RAIL C9900

Adjust your comfort

Device for height adjustment for all hair dryers of MG88H series. The sturdy stainless steel structure is equipped with height adjustment device with safe brake. The inside counter-weight simplifies the lifting and the lowering reducing the end user's effort.

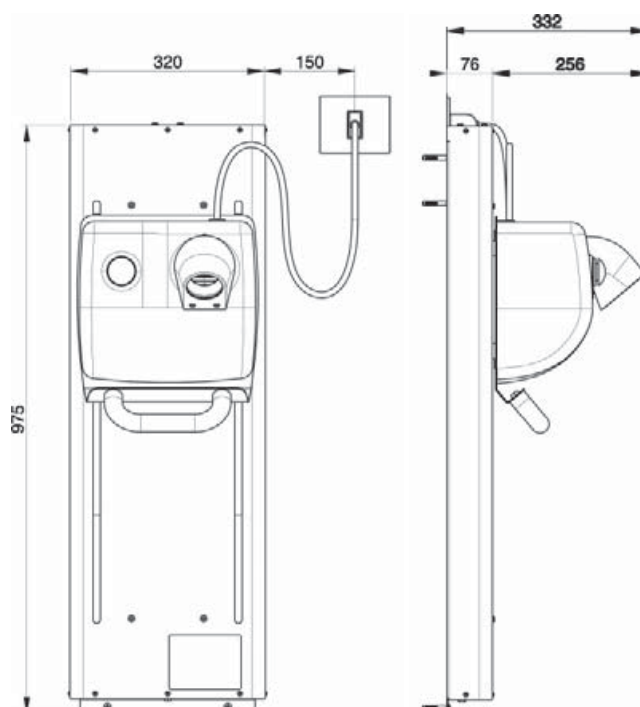

Standard range



C9900
Inox Satin


HAIR DRYER NOT INCLUDED
Accessory compatible with hair dryers MG88H

Pcs/Box 1

FUMAGALLI® MG88HT LEM

Ideal for sports centres

Anti-vandal and anti-theft, high-performance warm air hair dryer, equipped with revolving nozzle with thermal protection. Sturdy structure made of carbon steel with anti-rust treatment available on the black and white porcelain version, alternatively stainless steel AISI 304 in satin or bright version. Completed by SKINCARE & WATER STOP safety devices. Electrical protection level: Class II. Long life motor equipped with LEM patented system which allows fast and easy maintenance. Matching with single or multiple coin box for paying service and with the sliding rail for height adjustment.

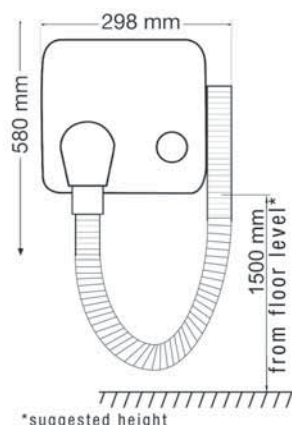

LEM system



STANDARD
Anti-rust
porcelain



STANDARD
Nozzle with
skincare
protection

	MG88HT LEM
Activation	Push button
Cover material	Stainless steel AISI 304/Carbon steel
Finishing	Bright/Satin/Enamelled
Electrical protection level	Class II
Ingress protection level	IP21 (IP23 with fixed nozzle)
Supply voltage	220/240 V
Main frequency	50/60 Hz
Motor power	250 W
Heating element	750 W
Total absorption	1000 W
Outlet air speed	98,3 km/h
Air flow	250 m³/h
Air temperature at 15 cm	46,8 °C
Noise level	63,9 dB
Test certificate	Yes
Pcs/Box	1
Pcs/Pallet	40

Standard range

MG88HT (b) LEM White	MG88HT (a) LEM Black	MG88HT (l) LEM Inox Bright	MG88HT (s) LEM Inox Satin

Combination with accessories



Sliding rail **C9900**




KIT MAGNUM VISION SPORT HT **BLU8001**
KIT MAGNUM VISION SPORT HTM **BLU8002**

FUMAGALLI®

KIT MAGNUM VISION SPORT HT KIT MAGNUM VISION SPORT HTM

Semi built-in

Kit made of stainless steel AISI 304, satin finishing. FUMAGALLI VISION SPORT HTM, is equipped with a mirror to give the maximum comfort to users.

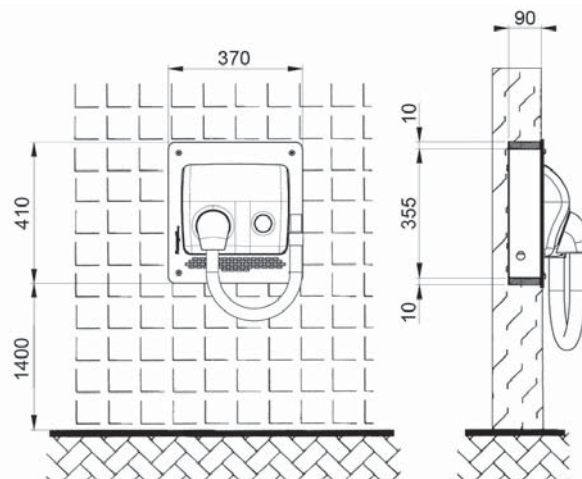

Example + MG88

	KIT MAGNUM VISION SPORT HT	KIT MAGNUM VISION SPORT HTM
Pcs/Box	1	1
Pcs/Pallet	32	32


Standard range

BLU8001S002000 Inox Satin	BLU8001L002000 Inox Bright
BLU8002S002000 Inox Satin	BLU8002L002000 Inox Bright
HAIR DRYER NOT INCLUDED Accessory compatible with hair dryers MG88	

HOSPITALITY MH910

Hair dryer with flexible hose

Design & comfort for hospitality. Available in White or Silver. Automatically activated when removing the handle, safety switch off after 8 minutes. Provided with easy-to-install wall bracket. Electrical protection level: Class II.

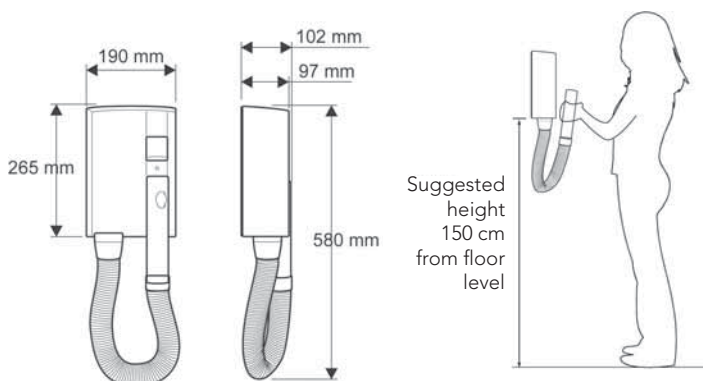

	MH910
Activation	Automatic when removing handle from holder
Cover material	ABS additivated with antistatic
Electrical protection level	Class II
Ingress protection level	IP24
Supply voltage	220/240 V
Main frequency	50/60 Hz
Total absorption	1200 W
Outlet air speed	90 km/h
Air flow	17 lt/sec
Pcs/Box	4
Pcs/Pallet	72

**SPECIAL
PRICE**
2015/2016


Standard range



MH910 (w)
White

HOSPITALITY R810

Hair dryer with flexible hose, with double shaver socket. Available in White or Grey. Automatically activated when removing the handle, safety switch off after 4 minutes. Double shaver socket 110 - 120/220 - 240 V. Provided with easy-to-install wall bracket and cable. Electrical protection level: Class II.

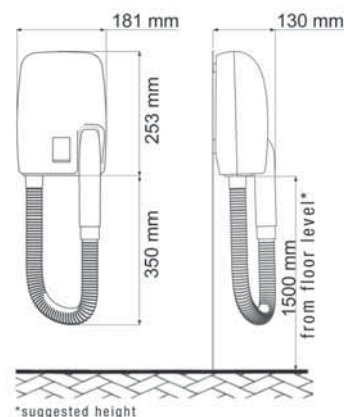

DOUBLE SHAVER SOCKET



AIR FLOW REGULATOR

	R810
Activation	Automatic when removing handle from holder
Cover material	ABS
Electrical protection level	Class II
Ingress protection level	IP23
Supply voltage	220/240 V
Main frequency	50/60 Hz
Total absorption	800 W
Double shaver socket	110 - 120V/220 - 240V
Adjustable outlet air speed	Yes
Air flow	-
Pcs/Box	6
Pcs/Pallet	120

**SPECIAL
PRICE**
2015/2016

Standard range




R810 (w)
White



R810 (s)
Grey

HOSPITALITY MH710A

Drawer hair dryer. Shocks and wear resistant.
On/Off switcher. Electrical protection level: Class II.
Spiral cable (extensible up to 3 m), with European plug.

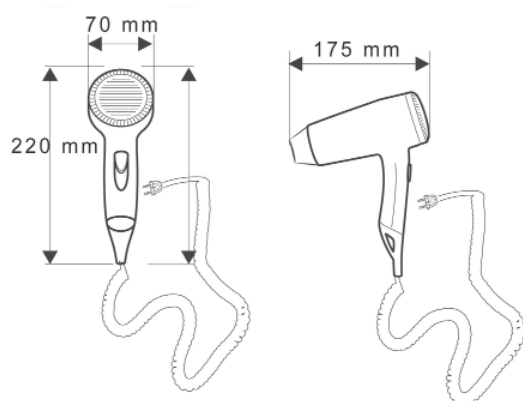

	MH710A
Activation	Push button
Cover material	PC
Electrical protection level	Class II
Supply voltage	220/240 V
Main frequency	50/60 Hz
Total absorption	1200 W
Air flow	22,5 Lt/sec
Pcs/Box	6
Pcs/Pallet	240

**SPECIAL
PRICE**
2015/2016


Standard range



MH710A
White

HOSPITALITY MH710C

Gun hair dryer with triple shaver socket. Shocks and wear resistant. On/Off switcher, activation by safety push button. Double air flow regulator.

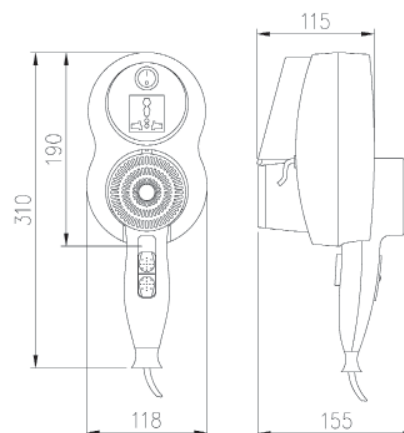

TRIPLE GRIP



DOUBLE AIR REGULATION

	MH710C
Activation	Push button
Cover material	ABS
Electrical protection level	Class II
Supply voltage	220/240 V
Main frequency	50 Hz
Total absorption	200 - 1200 W
Air flow	80 m ³ /h
Pcs/Box	1
Pcs/Pallet	315

**SPECIAL
PRICE**
2015/2016


Standard range



MH710C
White

HOSPITALITY MH610

Gun hair dryer. Shocks and wear resistant. Activation by pushing button with standard air flow and temperature level. The air intake grille, the On/Off switch complete the safety equipment. Electrical protection level: Class II.

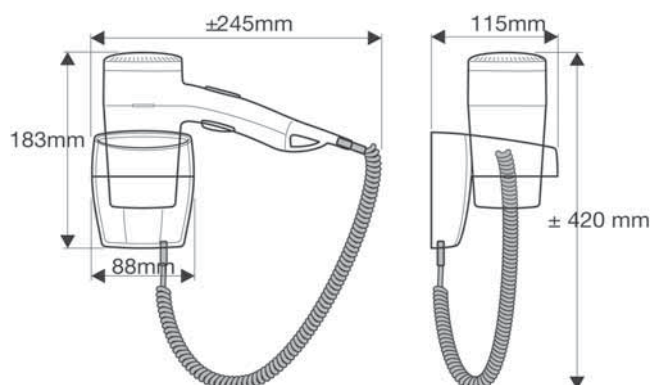

	MH610/C
Activation	Push button
Cover material	ABS/PC
Electrical protection level	Class II
Supply voltage	220/240 V
Main frequency	50/60 Hz
Total absorption	1200 W
Air flow	22,5 Lt/sec
Pcs/Box	6
Pcs/Pallet	240



Standard range



MH610
White

PARTS AIR



PARTS SERIES FUMAGALLI HANDS

<div> <div>■</div> RICAMBIO STANDARD <div>●</div> RICAMBIO OPZIONALE </div>		FUMAGALLI TP10 Microjets	FUMAGALLI NATUS	FUMAGALLI HI-TECH	
CODICE	DESCRIZIONE	TP10	LW44A	FM09A EC	FM09A ECP
FCR125C500	Magnum HI-TECH chromed bright cover			■	■
FCR155	HI-TECH Electronic board			■	■
FCR156	HI-TECH e TP10 Kit for photocell	■		■	■
FCR254	HI-TECH ECP LEM motor				■
FCR268	Electronic board for motor speed regulation for MG88-FM09-TP10	■		■	■
MGR003ALV	Electronic board with photocell GF1V (Rev.2)		■		
MGR006LVP1	Natus white cover		■		
MGR011LV	Fan		■		
MGR016LV	Motor		■		
MGR018LV	Heating element 1500 W		■		
MGR113	Complete Fan			■	■
MGR118	Anti-theft screw			■	■
MGR121P3T	Heating element 2000 W			■	■
MGR122	Motor			■	
MGR122H	High speed Electric Motor 450				■
MGR139A	Fuse for MG88			■	■
MGR145	LEM scroll			■	■
MGR174A	Carbon brushes (pair)			■	■
MGR206	UV Antibacterial Lamp	●			
MGR253	LEM Motor/Fan Kit for 250 LEM model			■	
MGR254	LEM Motor/Fan Kit for 450 LEM model				■
TPR122A	Electric Motor 800 H	■			
TPR150CT	New version stainless steel bright cover for TP10	■			
TPR155	Electronic board for TP10	■			
TPR156	Expansion card photosensor splitter for TP10	■			
TPR500	Panel air filter for TP10	■			
TPR500A	Panel air filter for TP10 medium density	■			

PARTS SERIES FUMAGALLI HANDS

<div> <div>■ RICAMBIO STANDARD</div> <div>● RICAMBIO OPZIONALE</div> </div>		FUMAGALLI HAND 250 STANDARD		FUMAGALLI HAND 450 ECO LEM		FUMAGALLI HAND UVC Antibatterico		FUMAGALLI HAND 250 LEM		FUMAGALLI SPACE
CODICE	DESCRIZIONE	MG88P	MG88A	MG88P	MG88A	MG88A UVC	MG88P UVC	MG88P LEM	MG88A LEM	MG88I EP
MGR10600C5	Complete push button	■		■			■	■		■
MGR107C5	Chromed nozzle	■	■	■	■	■	■	■	■	■
MGR113	Complete fan	■	■	■	■	■	■	■	■	■
MGR114	Scroll	■	■							
MGR118	Anti-theft screw	■	■	■	■	■	■	■	■	
MGR119	Electromechanical timer 36"	■						■		■
MGR119C	Electromechanical timer 24"	●						●		●
MGR121P2	Heating element 1500 W	●	●	■	■			●	●	■
MGR121P3	Heating element 2000 W	■	■			■	■	■	■	■
MGR121P4	Heating element 1000 W			●	●					
MGR122	Electric motor 250	■	■			■	■	■	■	■
MGR122H	High Speed 450 electric motor			■	■					■
MGR125A100PP1	Push button cover enamelled white no logo	●		●				●		
MGR125A10PEE1	Push button cover enamelled white Fumagalli Logo	●		●				●		
MGR125A10PEE2	Push button cover enamelled black no logo	●		●				●		
MGR125A10PEE3	Push button cover enamelled yellow Fumagalli logo	●		●				●		
MGR125A10PPP1	Push button cover enamelled white	■		■				■		
MGR125A10PPP2	Push button cover enamelled black	■		■				■		
MGR125A200AP1	Automatic cover enamelled white no logo		●		●					
MGR125A20AAP1	Automatic cover enamelled white		■		■				■	
MGR125A20AAP2	Automatic cover enamelled black	■			■				■	
MGR125A20AEE1	Automatic cover enamelled white Fumagalli Logo		●		●				●	
MGR125A20AEE2	Automatic cover enamelled black Fumagalli Logo		●		●				●	
MGR125C100PC5	Push button cover SS bright	■		■				■		
MGR125C100PS4	Push button cover SS satin	■		■				■		
MGR125C200PC5	Automatic cover for SS bright		■		■				■	
MGR125C200PS4	Automatic cover for SS satin		■		■				■	
MGR139A	Fuse for MG	■	■	■	■	■	■	■	■	■
MGR141	Push-rod	■		■			■	■		■
MGR145	LEM scroll			■	■	●	●	■	■	■
MGR155A	Electronic board GF1A (Rev.2)		■		■	■			■	
MGR156A	Sensor Photosensors GF1B (Rev. 2)		■		■	■			■	
MGR174A	Carbon brushes (pair)	■	■	■	■	■	■	■	■	■
MGR206	UV Antibacterial Lamp					■	■			
MGR226B	Electronic timer 24"			■	■					
MGR253	Kit Motor/Fan for 250 LEM model							■	■	
MGR254	Kit Motor/Fan for 450 LEM model			■	■					

RICAMBI SERIE FUMAGALLI CAPELLI

		FUMAGALLI HAIR H Bocchetta orientabile	FUMAGALLI HAIR HT Tubo estensibile	FUMAGALLI HAIR a tubo		FUMAGALLI HAIR a pistola	
Codice	Descrizione	MG88H	MG88HT	R 810	MH 910	MH 610	MH 710
MGR10600C5	Complete push button	■	■				
MGR107B	Nozzle with nozzle cover for H model	■					
MGR107BHT	Nozzle with nozzle cover for HT model		■				
MGR113	Complete Fan		■				
MGR113B	Complete Fan	■					
MGR118	Anti-theft screw	■	■				
MGR119AH	Electromechanical timer 90" (Class II)	●	●				
MGR119BH	Electromechanical timer 180" (Class II)	●	●				
MGR121P1HT	Heating element 750 W (Class II)		■				
MGR121P2H	Heating Element 1500 W (Class II)	●	●				
MGR121P3H	Heating element 2000 W H model Class II	■					
MGR121P4H	Heating Element 1000 W HT model Class II		■				
MGR122	Electric Motor 250	■	■				
MGR125A10HEE1	Push button cover enamelled white H model Fumagalli Logo	●					
MGR125A10HEE2	Push button cover enamelled black H model Fumagalli Logo	●					
MGR125A10HPP1	Push button cover enamelled white	■					
MGR125A10HPP2	Push button cover enamelled black	■					
MGR125A1HTEE1	Push button cover enamelled white for HT Fumagalli Logo		●				
MGR125A1HTPP1	Push button cover enamelled white for HT		■				
MGR125A1HTPP2	Push button cover enamelled black for HT		■				
MGR139A	Fuse for MG	■	■				
MGR141	Plastic tips	■	■				
MGR145	LEM scroll	■	■				
MGR162	Hair dryer hose support		■				
MGR163	Complete hose with nozzle		■				
MGR163S	Hose without joints		■	■	■		
MGR170	Junction hose nozzle		■				
MGR171	Outlet raccord (handle)		■				
MGR174A	Motor brushes (Pair)	■	■				
MGR226AH	Electronic Timer 90" H/HT model Class II	●	●				
MGR253H	Kit motor/fan for H model Class II	■					
MGR253HT	Kit motor/fan for HT model Class II		■				
MHR910T00001000	Hose for MH910 white				■		
MHR910T00002000	Hose for MH910 silver				■		
R810TUBI00000001	Hose for R810 white			■			
R810TUBI00000002	Hose for R810 silver			■			

[illegible]


 **Fumagalli Componenti** S.p.A.

FUMAGALLI *Italy*

BLU **ENI**


REFILLABLE LIQUID SOAP DISPENSER

Vertical liquid soap dispenser, with control light. Cover for topping with a key lock. The pre-set dose of soap is done by simply pressing the push button.

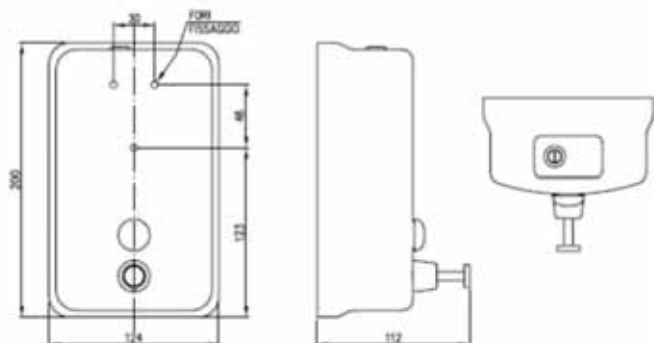

REFILLABLE LIQUID SOAP DISPENSER

Horizontal liquid soap dispenser, with control light. Cover for topping with a key lock. The pre-set dose of soap is done by simply pressing the push button.

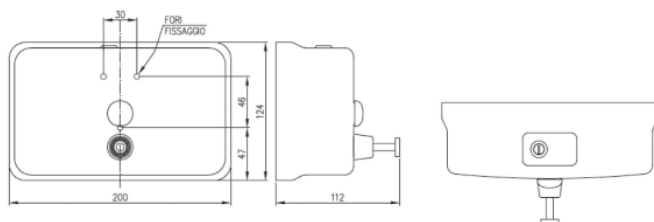


		
	BLU7002C0020000	BLU7002S0020000
Finishing	Inox Bright stainless steel - AISI 304	Inox Satin stainless steel - AISI 304
Capacity	1250 ml	1250 ml
Dimensions	124 x 209 x 124 mm	124 x 209 x 124 mm
Packing	Multiple 12 Pcs - 9 Kg	Multiple 12 Pcs - 9 Kg

		
	BLU7003C0020000	BLU7003S0020000
Finishing	Inox Bright stainless steel - AISI 304	Inox Satin stainless steel - AISI 304
Capacity	1250 ml	1250 ml
Dimensions	200 x 124 x 112 mm	200 x 124 x 112 mm
Packing	Multiple 12 Pcs - 9 Kg	Multiple 12 Pcs - 9 Kg

RECESSED LIQUID SOAP DISPENSER ON HORIZONTAL SURFACE


Recessed soap dispenser on a horizontal surface with supply mouth and piston in Stainless steel AISI 304 - fastening ring in chrome-plated brass. Unbreakable polyethylene tank.

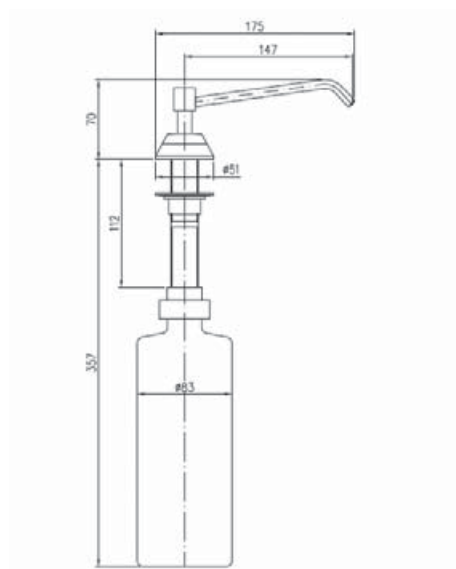

	C7004.S
Finishing	Inox Satin stainless steel - AISI 304
Capacity	900 ml
Dimensions	175 x 427 mm - length 147 mm
Packing	N.D.

FOLDED TOWEL PAPER DISPENSER

Folded and intervealed paper sheet wall-mounted dispenser with bright or satin finishing; equipped by security system with lock closure, window for paper check depletion with rounded edges to facilitate the extraction of the sheets.

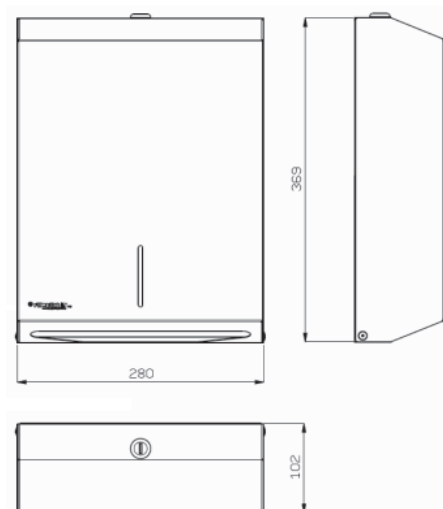


	BLU7101C0010000	BLU7101S0010000
Finishing	Inox Bright stainless steel	Inox Satin stainless steel
Capacity	400 sheets	400 sheets
Dimensions	280 x 369 x 99,4 mm	280 x 369 x 99,4 mm
Packing	1 Pcs - 1,2 kg	1 Pcs - 1,2 kg

	BLU7101C002000L	BLU7101S002000L
Finishing	Inox Bright stainless steel - AISI 304	Inox Satin stainless steel - AISI 304
Capacity	400 sheets	400 sheets
Dimensions	280 x 369 x 99,4 mm	280 x 369 x 99,4 mm
Packing	1 Pcs - 1,2 kg	1 Pcs - 1,2 kg


INTERLEAVED TOILET PAPER DISPENSER

Wall-mounted interleaved toilet paper dispenser realized in stainless steel with bright or satin finishing. Equipped by security system with lock closure, window for paper check depletion and opening with rounded edges gaskets to facilitate the extraction of the sheets.

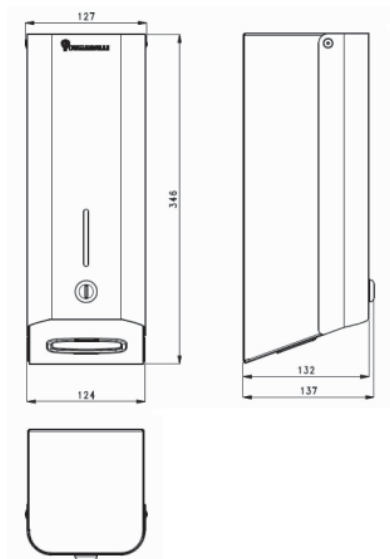

MAXI JUMBO TOILET ROLL DISPENSER

Paper towel dispenser Jumbo Maxi. Designed to house a maxi roll Ø 30 cm. Lock by metal key

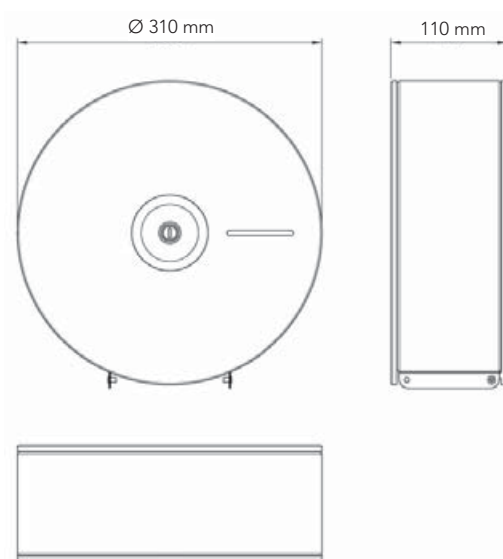


		
	BLU7201C001F000	BLU7201S001F000
Finishing	Inox Bright stainless steel	Inox Satin stainless steel
Capacity	2 standard box	2 standard box
Dimensions	124 x 346 x 132 mm	124 x 346 x 132 mm
Packing	1 Pcs - 1,2 kg	1 Pcs - 1,2 kg

		
	BLU7401C0010000	BLU7401S0010000
Finishing	Inox Bright stainless steel	Inox Satin stainless steel
Capacity	1 roll ø 290 mm	1 roll ø 290 mm
Dimensions	310 x 310 x 110 m m	310 x 310 x 110 m m
Packing	1 Pcs - 2,3 kg	1 Pcs - 2,3 kg

	BLU7401C002000L	BLU7401S002000L
Finishing	Inox Bright stainless steel - AISI 304	Inox Satin stainless steel - AISI 304
Capacity	1 roll ø 32 cm	1 roll ø 32 cm
Dimensions	340 x 340 x 120 m m	340 x 340 x 120 mm
Packing	1 Pcs - 2,3 kg	1 Pcs - 2,3 kg


TOILET SEAT COVER DISPENSER

Wall-mounted toilet seat cover dispenser realized in stainless steel with bright or satin finishing. Equipped by security system with lock closure and front opening with rounded edges to facilitate the extraction of the sheets.

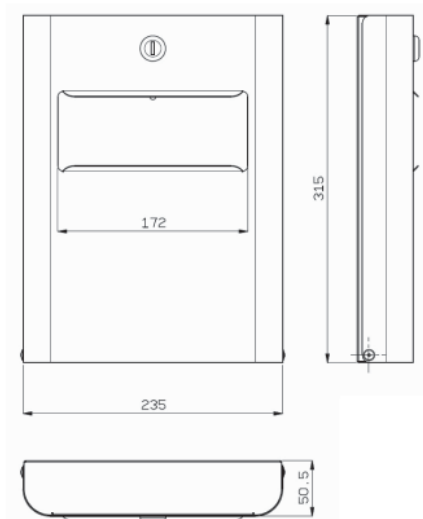

HYGIENIC BAGS DISPENSER

Wall-mounted hygienic bags dispenser realized in stainless steel with bright or satin finishing; designed to facilitate the extraction of the bags.

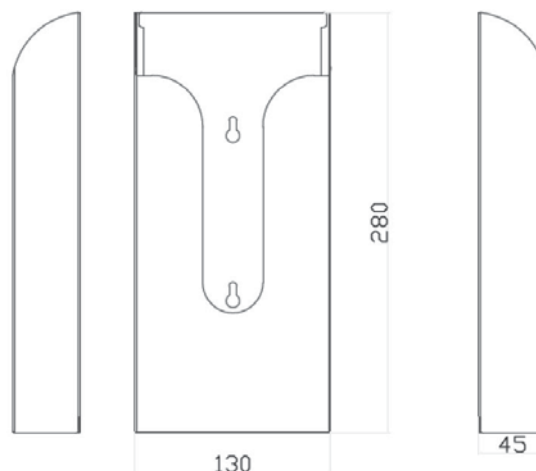

		
	BLU7601C0010000	BLU7601S0010000
Finishing	Inox Bright stainless steel	Inox Satin stainless steel
Capacity	1 standard box	1 standard box
Dimensions	235 x 275 x 46 mm	235 x 275 x 46 mm
Packing	1 Pcs - 1,8 kg	1 Pcs - 1,8 kg


	BLU7601C001000L	BLU7601S001000L
Finishing	Inox Bright stainless steel - AISI 304	Inox Satin stainless steel - AISI 304
Capacity	1 standard box	1 standard box
Dimensions	235 x 275 x 46 mm	235 x 275 x 46 mm
Packing	1 Pcs - 1,8 kg	1 Pcs - 1,8 kg

		
	BLU7301C0010000	BLU7301S001F000
Finishing	Inox Bright stainless steel	Inox Satin stainless steel
Capacity	1 standard box	1 standard box
Dimensions	130 x 280 x 45 mm	130 x 280 x 45 mm
Packing	1 Pcs - 1,8 kg	Multiple 4 Pcs - 2,05 Kg

	BLU7301C002008L	BLU7301S002000L
Finishing	Inox Bright stainless steel - AISI 304	Inox Satin stainless steel - AISI 304
Capacity	1 standard box	1 standard box
Dimensions	130 x 280 x 45 mm	130 x 280 x 45 mm
Packing	1 Pcs - 1,8 kg	Multiple 4 Pcs - 2,05 Kg


STEP-ON WASTE BIN

On the floor waste bin with step-on opening. Equipped with mechanism for cover lifting by pedal, with plastic removable container and folding handle.

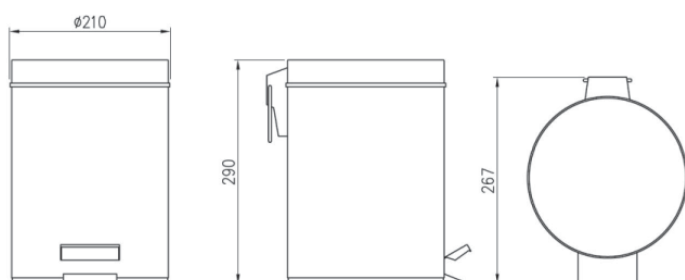

STEP-ON WASTE BIN

On the floor waste bin with step-on opening. Equipped with mechanism for cover lifting by pedal, with plastic removable container and folding handle.

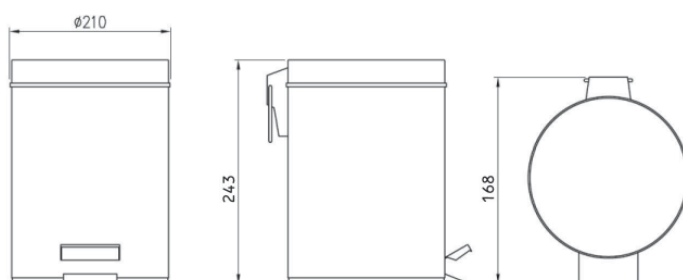


		
	BLU7302C0010000	BLU7302S0010000
Finishing	Inox Bright stainless steel - AISI 304	Inox Satin stainless steel - AISI 304
Capacity	5 lt	5 lt
Dimensions	267 x 290 x 210 mm	267 x 290 x 210 mm
Packing	1 Pcs	1 Pcs

	
	BLU7303C0020050
Finishing	Inox Bright stainless steel - AISI 304
Capacity	3 lt
Dimensions	168 x 243 x 210 mm
Packing	1 Pcs


WASTE BIN

Paper waste bin with 24 lt capacity, realized in stainless steel with bright or satin finishing, complete with rear bracket for wall mounting.

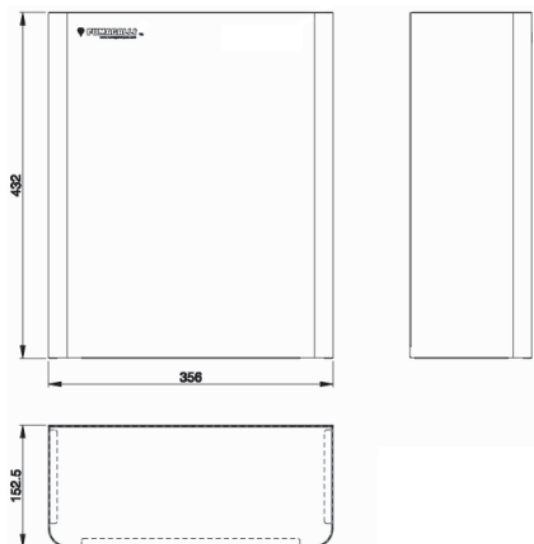

STEP-ON SANITARY NAPKIN RECEPTACLES

Plastic receptacle for sanitary napkins. White with grey cover activated by pedal. Step-on opening and wolf-mouth cover. The pedal is totally incorporated in the container structure. Complete with deodorant-dish cage or disinfectant and stretcher.

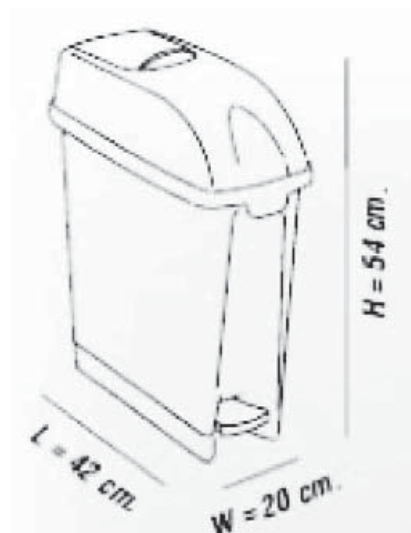


		
	BLU7501C0011000	BLU7501S0011000
Finishing	Inox Bright stainless steel	Inox Satin stainless steel
Capacity	25 lt	25 lt
Dimensions	356 x 432 x 152,5 mm	356 x 432 x 152,5 mm
Packing	1 Pcs - 3,8 kg.	1 Pcs - 3,8 kg.

	BLU7501C002000L	BLU7501S002000L
Finishing	Inox Bright stainless steel - AISI 304	Inox Satin stainless steel - AISI 304
Capacity	25 lt	25 lt
Dimensions	356 x 432 x 152,5 mm	356 x 432 x 152,5 mm
Packing	1 Pcs - 3,8 kg.	1 Pcs - 3,8 kg.

	
	BLU7304O0040000
Finishing	Polipropilene
Capacity	17 lt
Dimensions	420 x 540 x 200 mm
Packing	1 Pcs


RECESSED INTEGRERED WASTE BIN

Recessed integrated distributor with double roll toilet paper dispenser, toilet cover tissue distributor and removable disposable paper basket, realized in satin stainless steel finishing; equipped with dual safety system with lock closure and flap for access to the disposal paper trash.

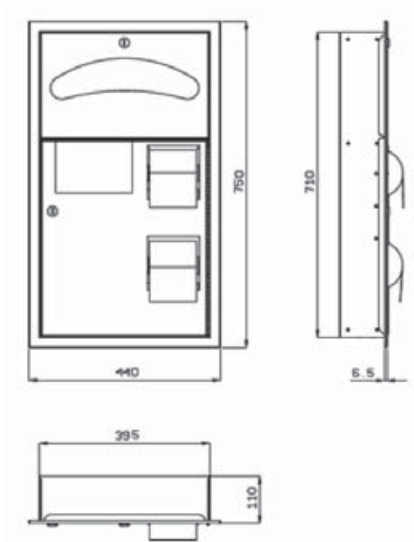


RECESSED MULTIPLE DISPENSER

Recessed integrated distributor with double roll toilet paper dispenser, toilet cover tissue distributor and removable disposable paper basket, realized in satin stainless steel finishing; equipped with dual safety system with lock closure and flap for access to the disposal paper trash.

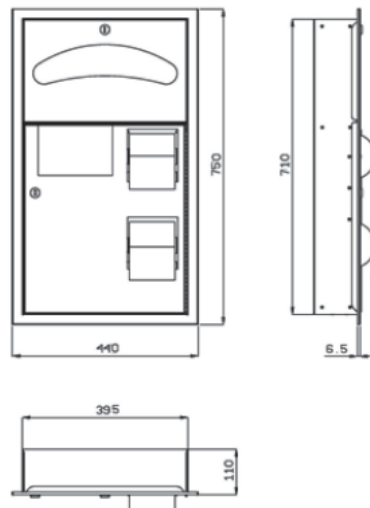


	
	BLU7510S0010000
Finishing	INOX SATIN STAINLESS STEEL
Capacity	Capacity 16 litri
Dimensions	280 x 800 x 108 mm
Packing	1 Pcs - 10 kg

	
	BLU7420S001000
Finishing	INOX SATIN STAINLESS STEEL
Capacity	2 standard rolls - 1 standard toilet seat cover pack + waste bin Capacity 4 litri
Dimensions	440 x 750 x 110 mm
Packing	1 Pcs - 9 kg

WALL MOUNTED TOILET BRUSH HOLDER

Toilet brush dispenser complete with holder equipped by plate for wall-mounting.

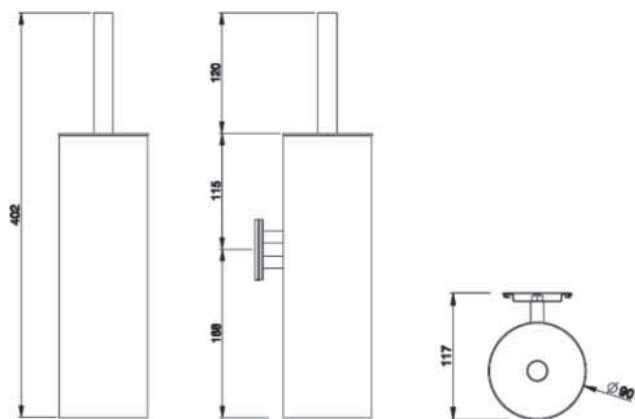

	BLU7701C0020000	BLU7701S0020000
Finishing	Inox Bright stainless steel - AISI 304	Inox Satin stainless steel - AISI 304
Capacity	-	-
Dimensions	117x 402 x 90 mm	117x 402 x 90 mm
Packing	1 Pcs	1 Pcs

TOILET BRUSH KIT WITH HANDLE

(Supplied as spare part)

BLU7701C0021001	BLU7701S0021001
INOX Bright - AISI 304 e NYLON	INOX Bright - AISI 304 e NYLON

TOILET BRUSH HOLDER

(Supplied as spare part)

BLU7701C0021002	BLU7701S0021002
INOX Bright - AISI 304	INOX Bright - AISI 304

BRUSH HEAD

(Supplied as spare part)

BLU7701C0041003
NYLON


BRUSH HEAD

(Supplied as spare part)

BLU7701C0041004
ABS

DOUBLE ROBE HOOK

Wall-mounted double robe hook realized in stainless steel with bright or satin finishing

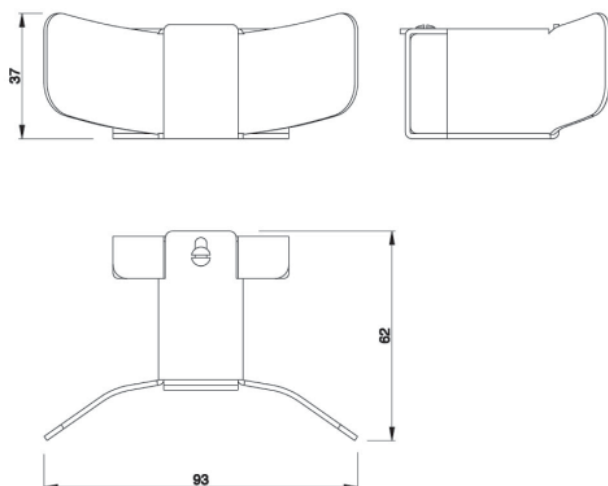

		
	BLU7801C0020000	BLU7801S0020000
Finishing	Inox Bright stainless steel	Inox Satin stainless steel
Capacity	-	-
Dimensions	93 x 37 x 62 mm	93 x 37 x 62 mm
Packing	1 Pcs	1 Pcs

SINGLE ROBE HOOK

Wall-mounted single robe hook realized in stainless steel with bright or satin finishing

	
	BLU7802C0020000
Finishing	Inox Bright stainless steel - AISI 304
Capacity	-
Dimensions	37 x 37 x 62 mm
Packing	1 Pcs

[illegible]

[illegible]

[illegible]



Fumagalli Componenti S.p.A.

HAND DRYERS




Fumagalli Componenti S.p.A.

HAIR DRYERS



Fumagalli Componenti S.p.A.

WATER



Fumagalli Componenti S.p.A.

DISABLED AND COMMUNITIES



Fumagalli Componenti S.p.A.

BLU LINE



Fumagalli Componenti S.p.A.

COMPASS



ehanddryers.com
PART OF THE O3 GROUP

 **Fumagalli Componenti** S.p.A.

Viale Edison, 9 - I - 20090 Trezzano S/Naviglio - (MI) - Italy
Tel. 0039 02 48403535 - Fax 0039 02 48403500
info@fumagallidryers.it - export@fumagallidryers.com
www.fumagallidryers.com