

Technical Specifications

Specifications

Power Rating: 230 V, 50 Hz / 60 Hz Dimensions: 38 x 38 x 58.4 cm

Weight: 25 kg

Construction: 304-series stainless steel

& durable plastic

Spin Speed: 2850 RPM Motor: 1/3 horsepower Cycle Time: 8 seconds

Power Consumption: 1.60 watts per cycle*

Certifications: Conformité Européene




Safety Features

Manual self-start and self-stop

No exposed moving parts

Built-in residual-current device (RCD)

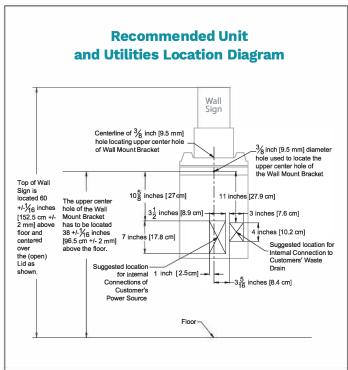

Manufactured in USA by Extractor Corporation, Illinois

UK/Ireland Distributor: o3 group ltd. www.suitmate.uk

Installation

Wall mounted via supplied Wall Mount Bracket Direct electrical connection to a 230 V, 50 Hz / 60 Hz, 13 Amp dedicated circuit

Water drainage to approved sanitary waste line or to floor drain

Operating Features

Easy to follow instructions

Manual self-start and stop via hand pressure

on the lid

Removes approximately 95% of a swimsuit's

water in 8 seconds

Uses no heat

Model	Configuration
EC5	230 V, 50 Hz / 60 Hz**

^{*}Varies based on basket load

^{**}Must specify hertz when ordering



