




VTX


TECHNICAL SPECIFICATION



REAR ELEVATION

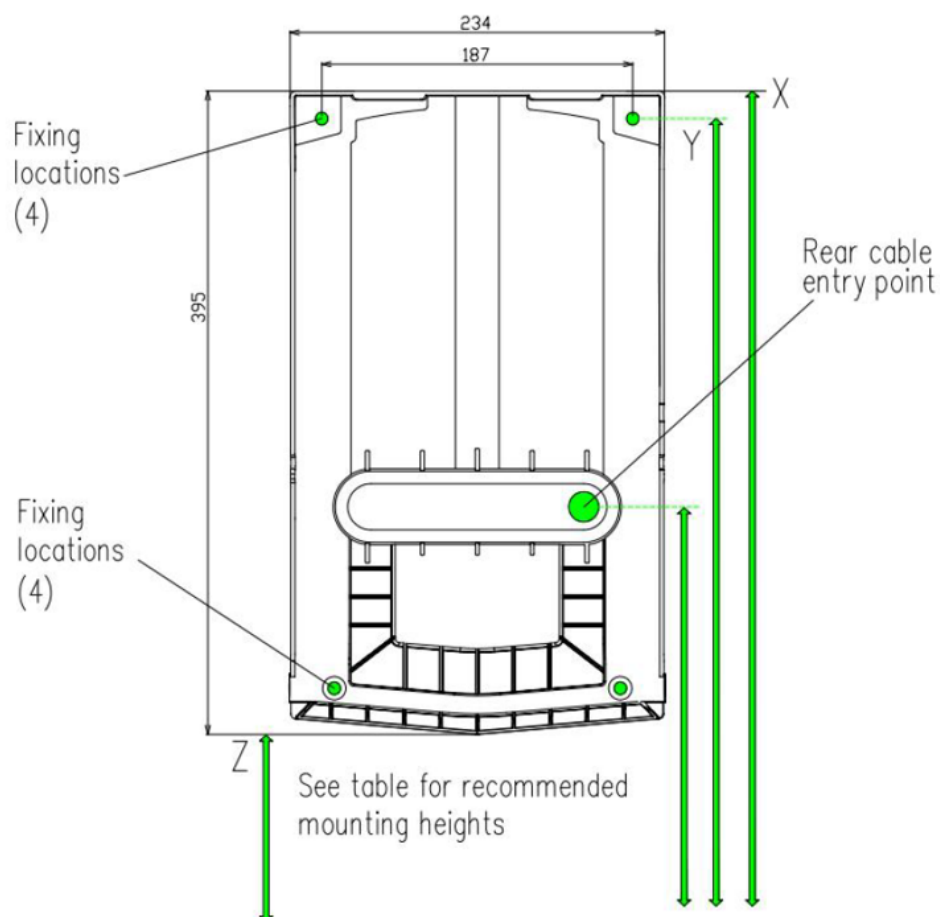

SIDE ELEVATION

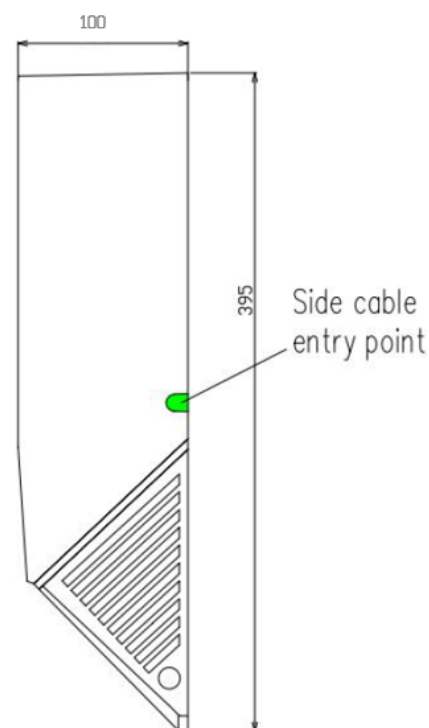

All dimensions shown in mm (+/-5 mm)

FLOOR

Recommended installation heights from floor		Minimum clearance	
Male	X 1324 mm Y 1300 mm Z 930 mm	220mm clearance either side and 30mm above machine.	
Female	X 1289 mm Y 1265 mm Z 895 mm	Cable entry point from floor	
Child or disabled	X 1074 mm Y 1050 mm Z 680 mm	Male	1089 mm
Child 5-8	X 952 mm Y 928 mm Z 558 mm	Female	1054 mm
Child 8-11	X 1052 mm Y 1028 mm Z 658 mm	Child or disabled	1089 mm
Child 11-14	X 1132 mm Y 1108 mm Z 738 mm	Child 5-8	717 mm
Machine dimensions		Child 8-11	817 mm
Height 395 mm Width 234 mm Depth 100 mm		Child 11-14	897 mm

Key Features			
Material:	Environmental PC	Air Temperature:	20-45°C
Mounting:	Wall Mount	Heating Element:	Yes
Motor Type:	Brushless DC Motor	Over time protection:	60s
Filter:	HEPA	Waterproof:	IP24
Sterilizing:	UV Light	Air Volume:	30L/s
Voltage:	220V-240V -50/60Hz	Noise Level(db):	75-79dB
Rated Power:	800-1900W	Dimension:	234*100*395mm
Drying time:	8-10s	Application:	Home,Hotel, Commercial
Air Speed:	160m/s	Feature:	Ultra Thin/High Speed/Fast dry

Electrical

Input voltage/Frequency: 220V-240V -50/60Hz

Standby power consumption: Less then 0.5 W

Motor specification: 700 W brushless motor

Construction

Fascia: PC material

Antibacterial coating type:

Cover contains antibacterial additive in paint.

Can help prevent the growth of bacteria.

Back plate mounting bracket: ABS/PBT Plastic

Water ingress protection to IP24

Filter

HEPA filter

99% of particles captured (PM2.5)

Operation

Touch free capacitive sensor activation

Hand dry time measurement: 8-10 seconds

Sound power level: 65 dB(A) @ 2 m

Operation lock-out period: 60 seconds

Package:

Net weight: 2.95 kg / 6.25 lbs

Packaged weight: 4.0 kg / 8.81 lbs

Packaged dimensions:

(H)435 × (W)297 × (D)157 mm / (H)17.13" × (W)11.69" × (D)6.2"

